

## Bollard Light

### BOLLARD90A or B-1000-P-8W



<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	8W ±5%
<b>Input Voltage</b>	AC220-240V
<b>Driver</b>	Internal
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.
<b>Beam Angle (°)</b>	360
<b>CCT (Kelvins)</b>	3000°K; 4000°K; 5000°K; 5700°K
<b>Lumens</b>	620-750
<b>Luminaire efficiency</b>	94 Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Black
<b>Cover</b>	Clear
<b>Dimensions</b>	dia 100*1000mm
<b>Protection Rating</b>	IP65/IK08
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

#### Other

Optional: CCT switch; Available in 750 and 400mm and Wall light


#### Standard Packing Details

<b>Unit Volum (CBM)</b>	0,03181
<b>Unit GW (kg)</b>	2,68
<b>Qty per carton</b>	6

**Bollard Light**

**BOLLARD90A or B-1000-P-8W**

Sizes drawing

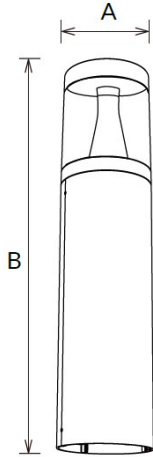


BOLLARD90A or B-1000-P-8W.drw

in mm

Illumination Diagram

750Lm with 360° beam

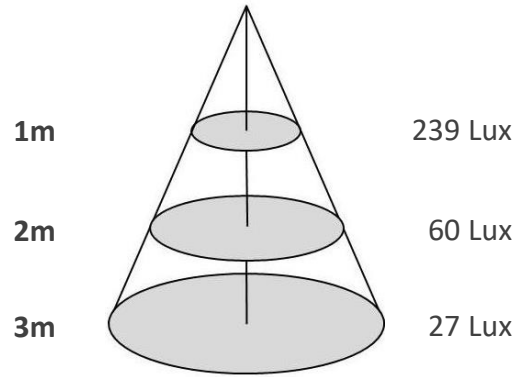

BOLLARD90A or B-1000-P-8W.lux

