

### DWR130-DR-C-35W



<b>Source</b>	LED Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	35W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Kegu; Lifud
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 1-10V dim; DALI
<b>Beam Angle (°)</b>	15/24/38
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	3400-3600
<b>Luminaire efficiency</b>	103Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Clear; Louver
<b>Dimensions</b>	Dia A130*B115 (C120)mm
<b>Protection Rating</b>	Indoor Use
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

#### Standard Packing Details


<b>Unit Volum (CBM)</b>	0,00418
<b>Unit GW (kg)</b>	0
<b>Qty per carton</b>	9

#### Other

Flicker free driver; Tridonic or Philips Driver; Reflector cup: Matt Silver, Matt Black, Sand White, Sand Black, White Gun black, Silver, Champagne gold, Rose gold

DWR130-DR-C-35W

Sizes drawing

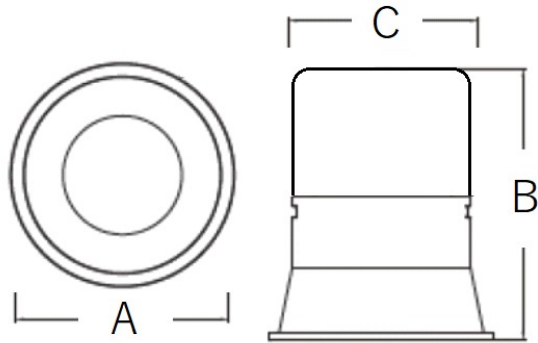


DWR130-DR-C-35W.drw


in mm

Illumination Diagram


3600Lm with 24° beam

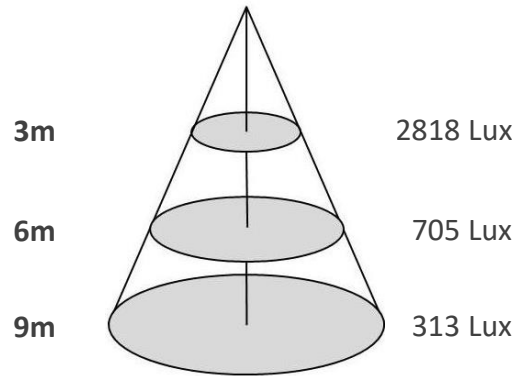

DWR130-DR-C-35W.lux



0~30° adjustable



355° horizontal rotation

Damping point