

DWR105-DRF-C-30W



DWR105-DRF-C-30W.png

| | |
|-----------------------------|--|
| Source | LED Bridgelux |
| Connection | Wire |
| Gr. Power | 30W ±5% |
| Input Voltage | AC85-277V |
| Driver | Included |
| Control (standard) | Not dim. |
| Dimming option | Triac dim.; 0-10V dim.; DALI |
| Beam Angle (°) | 15/24/38 |
| CCT (Kelvins) | 2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K |
| Lumens | 2900-3100 |
| Luminaire efficiency | 103Lm/W |
| CRI (standard) | >80Ra |
| for option | >90Ra; >97Ra |
| Fixture Color | White; Black |
| Cover | Clear; Louver |
| Dimensions | Dia A105*B115(C95)mm |
| Protection Rating | Indoor Use |
| Electrical Class | Class II |
| Lifetime | >50.000h |
| Warranty | 3 Years |

Standard Packing Details


| | |
|-------------------------|---------|
| Unit Volum (CBM) | 0,00217 |
| Unit GW (kg) | 0 |
| Qty per carton | 18 |

Other

Flicker free driver; reflector cup: Matt Silver, Matt Black, Sand White, Sand Black, White Gun black, Silver, Champagne gold, Rose gold

DWR105-DRF-C-30W

Sizes drawing

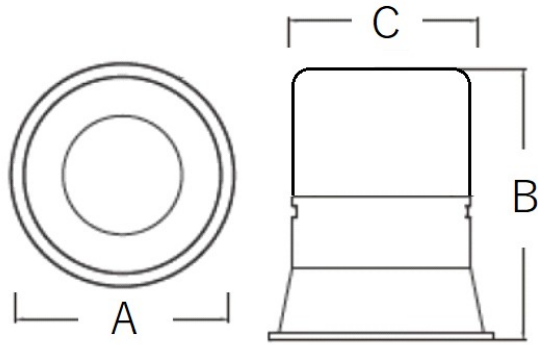


DWR105-DRF-C-30W.drw

in mm

Illumination Diagram

3100Lm with 24° beam

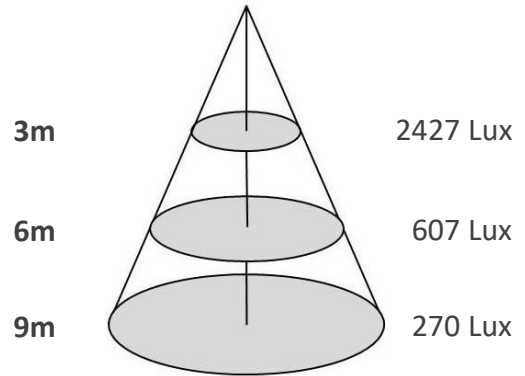

DWR105-DRF-C-30W.lux

