


DWR105-SOG-C-15W

Sizes drawing

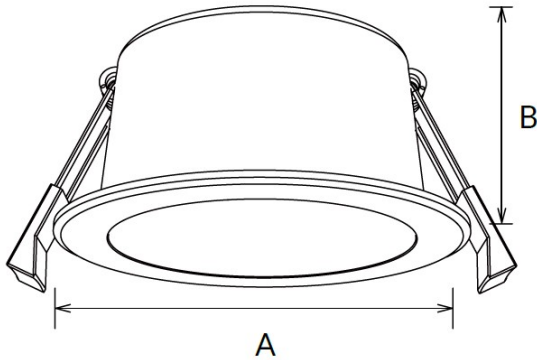


DWR105-SOG-C-15W.drw

in mm

Illumination Diagram

1500Lm with 120° beam

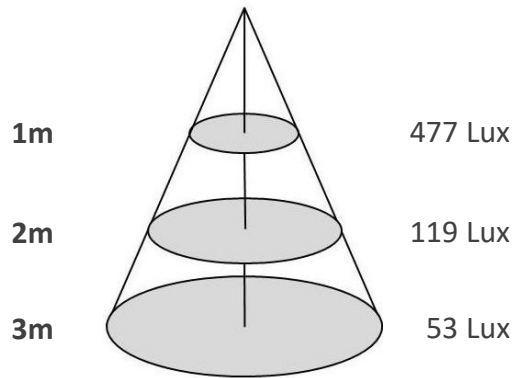


DWR105-SOG-C-15W.lux

Reflector

- W White
- B Black
- CH Chrome
- BN Brushed Nickel
- BB Brushed Brass



### DWR105-SOG-C-15W DALI

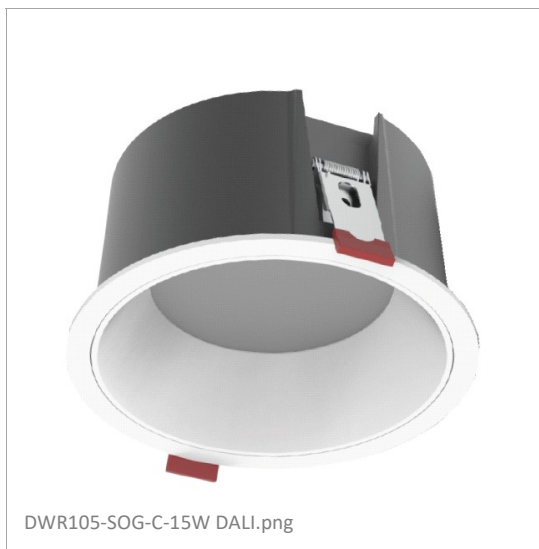

<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	15W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Boke; Lifud
<b>Control (standard)</b>	DALI
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	120
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	100Lm/W
<b>Luminaire efficiency</b>	100Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Stripped
<b>Dimensions</b>	Dia 105*64mm (hole 90)
<b>Protection Rating</b>	IP40 / IK07
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

#### Other

Reflector in White, Black, Silver or Gold; Cree, Citizen or Osram LED; Tridonic, Philips or Osram Driver; 5 years warranty for option

#### Standard Packing Details

<b>Unit Volum (CBM)</b>	0,00127
<b>Unit GW (kg)</b>	0,55
<b>Qty per carton</b>	50