


Surface Downlight

DWR140-MB-SF-C-30W

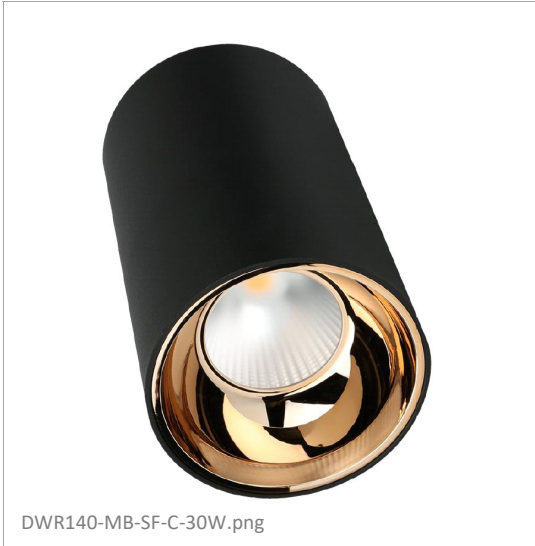

Source	LED Cree; Bridgelux; Citizen
Connection	Wire
Gr. Power	30W ±5%
Input Voltage	AC85-277V
Driver	Kegu; Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/30/45
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	2800-3200
Luminaire efficiency	107Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Lens
Dimensions	dia142*162mm
Protection Rating	Indoor Use
Electrical Class	Class I
Lifetime	>50.000h
Warranty	3 (Years)

Other
Reflector Cup: White, Black, Silver, Gold; Surface mounted or for option pendant mounted


Standard Packing Details

Unit Volum (CBM)	0,00510
Unit GW (kg)	1,35
Qty per carton	12

Surface Downlight

DWR140-MB-SF-C-30W

Sizes drawing

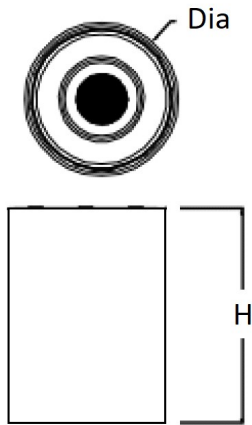


DWR140-MB-SF-C-30W.drw

in mm

Illumination Diagram

3200Lm with 30° beam

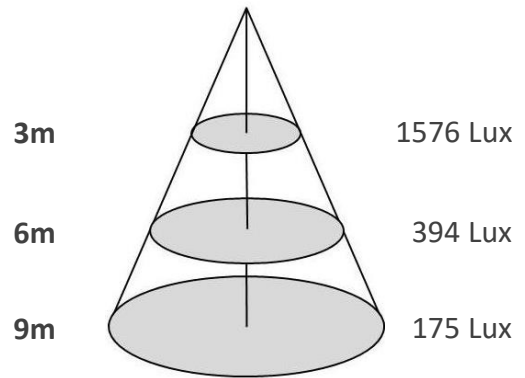

DWR140-MB-SF-C-30W.lux

