

### DWR160-OG-C-30W



DWR160-OG-C-30W.png

<b>Source</b>	LED Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	30W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Lifud
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	13/24/38/60
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	3000
<b>Luminaire efficiency</b>	100Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Stripped
<b>Dimensions</b>	Dia 160*82mm (hole 145)
<b>Protection Rating</b>	IP40 / IK07
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

#### Standard Packing Details

<b>Unit Volum (CBM)</b>	0,00335
<b>Unit GW (kg)</b>	0,7
<b>Qty per carton</b>	30


#### Other

Reflector in White, Black, Silver or Gold; Cree, Citizen or Osram LED; Tridonic, Philips or Osram Driver; 5 years warranty for option

## Downlight

### DWR160-OG-C-30W

Sizes drawing

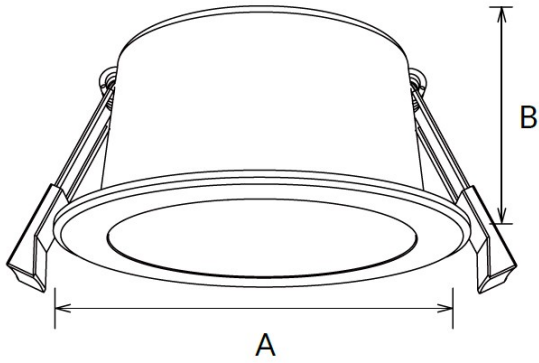


DWR160-OG-C-30W.drw

in mm

Illumination Diagram

3000Lm with 24° beam

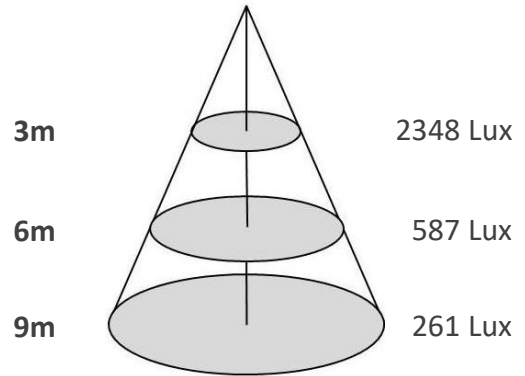

DWR160-OG-C-30W.lux

