

**DWR180-SOG-C-40W**



DWR180-SOG-C-40W.png

<b>Source</b>	LED Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	40W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Lifud
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	120
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	4000
<b>Luminaire efficiency</b>	100Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Stripped
<b>Dimensions</b>	Dia 180*90mm (hole 160)
<b>Protection Rating</b>	IP40 / IK07
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

**Other**

Reflector in White, Black, Silver or Gold; Cree, Citizen or Osram LED; Tridonic, Philips or Osram Driver; 5 years warranty for option


**Standard Packing Details**

<b>Unit Volum (CBM)</b>	0,00456
<b>Unit GW (kg)</b>	0,88
<b>Qty per carton</b>	20

## Downlight

### DWR180-SOG-C-40W

Sizes drawing

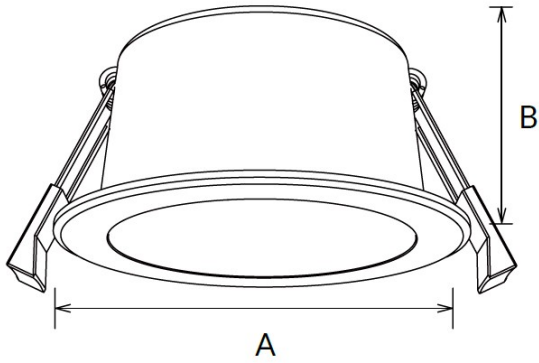


DWR180-SOG-C-40W.drw

in mm

Illumination Diagram

4000Lm with 120° beam

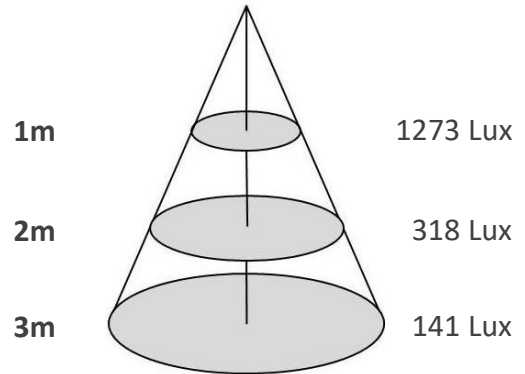

DWR180-SOG-C-40W.lux

