

DWR230-SOG-C-50W



DWR230-SOG-C-50W.png

Source	LED Bridgelux
Connection	Wire
Gr. Power	50W ±5%
Input Voltage	AC85-277V
Driver	Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	120
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	5000
Luminaire efficiency	100Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Stripped
Dimensions	Dia 230*100mm (hole 200)
Protection Rating	IP40 / IK07
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 Years

Other


Reflector in White, Black, Silver or Gold; Cree, Citizen or Osram LED; Tridonic, Philips or Osram Driver; 5 years warranty for option

Standard Packing Details

Unit Volum (CBM)	0,00861
Unit GW (kg)	1,45
Qty per carton	8

DWR230-SOG-C-50W

Sizes drawing

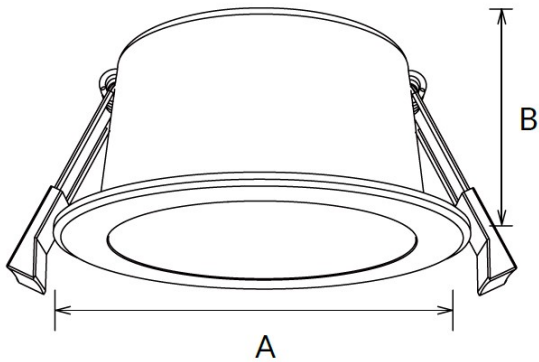


DWR230-SOG-C-50W.drw

in mm

Illumination Diagram

5000Lm with 120° beam

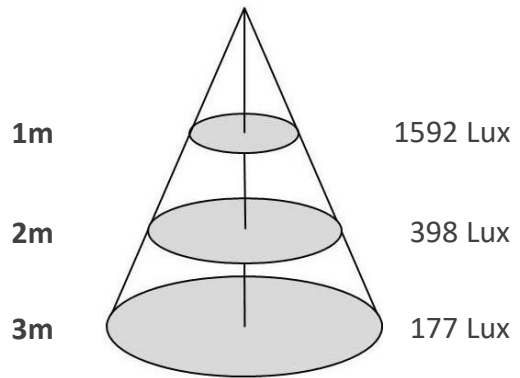

DWR230-SOG-C-50W.lux

Reflector

- W White
- B Black
- CH Chrome
- BN Brushed Nickel
- BB Brushed Brass

