

**DWR65-DR4-P-8W**



<b>Source</b>	LED Cree; Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	8W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Kegu; Lifud
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	8/12/15/24/36/50/60°
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	750-850
<b>Luminaire efficiency</b>	106Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Lens
<b>Dimensions</b>	dia 65*61(hole 55)mm
<b>Protection Rating</b>	IP44 / UGR<13
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years


**Other**  
Honeycomb Louver; Flicker free driver; 5 years warranty extension

**Standard Packing Details**

<b>Unit Volum (CBM)</b>	0,00072
<b>Unit GW (kg)</b>	0
<b>Qty per carton</b>	50

**DWR65-DR4-P-8W**

**Sizes drawing**

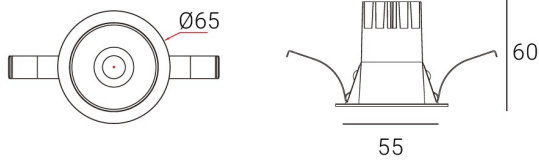


DWR65-DR4-P-8W.drw

in mm

**Illumination Diagram**

850Lm with 36° beam

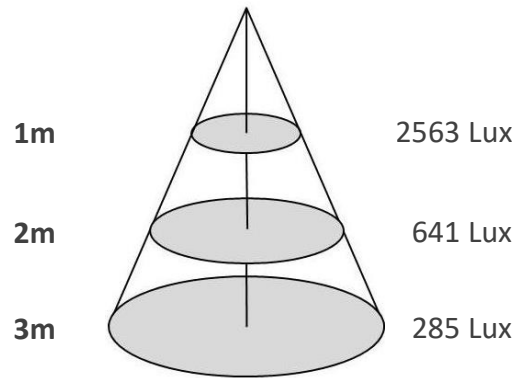

DWR65-DR4-P-8W.lux

**PMMA high luminous rate  
Ribbed structure Lens**


The ribbed structure design is adopted, with its own antiglar so that the light is interwoven at the center of the reflector, effectively reducing stray light, spot transition is even, more soft and comfortable.



**Spring type:**



**Bending Spring**

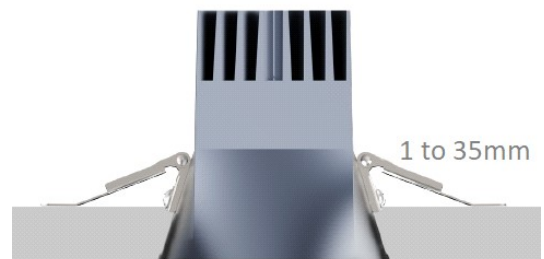

**Spring Clip**

