

DWR65-DRF-C-5W



DWR65-DRF-C-5W.png

<b>Source</b>	LED Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	5W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Included
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	15/24/38
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	450-550
<b>Luminaire efficiency</b>	110Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Clear; Louver
<b>Dimensions</b>	Dia A63*B68 (C55)mm
<b>Protection Rating</b>	Indoor Use
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

Standard Packing Details

<b>Unit Volum (CBM)</b>	0,00062
<b>Unit GW (kg)</b>	0
<b>Qty per carton</b>	18


**Other**

Flicker free driver; reflector cup: Matt Silver, Matt Black, Sand White, Sand Black, White Gun black, Silver, Champagne gold, Rose gold

## Downlight

### DWR65-DRF-C-5W

Sizes drawing

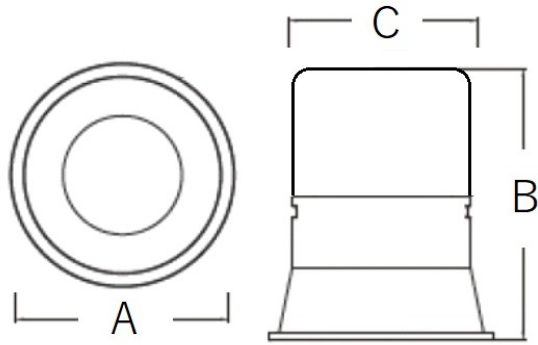


DWR65-DRF-C-5W.drw

in mm

Illumination Diagram

550lm with 24° beam

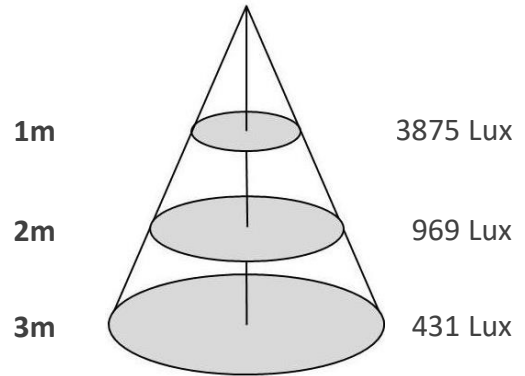

DWR65-DRF-C-5W.lux

