

**DWR75-DR4-P-10W**




<b>Source</b>	LED Cree; Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	10W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Kegu; Lifud
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	8/12/15/24/36/50/60°
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	950-1050
<b>Luminaire efficiency</b>	105Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Lens
<b>Dimensions</b>	dia 75*70(hole 65)mm
<b>Protection Rating</b>	IP44 / UGR<13
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years
<b>Other</b>	Honeycomb Louver; Flicker free driver; 5 years warranty extension

**Standard Packing Details**

<b>Unit Volum (CBM)</b>	0,00091
<b>Unit GW (kg)</b>	0
<b>Qty per carton</b>	32

DWR75-DR4-P-10W

Sizes drawing

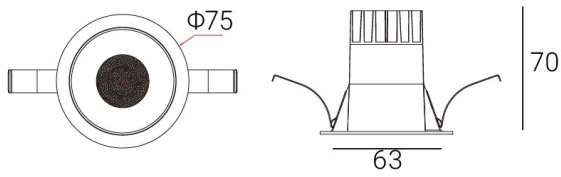


DWR75-DR4-P-10W.drw

in mm

Illumination Diagram

1050Lm with 36° beam

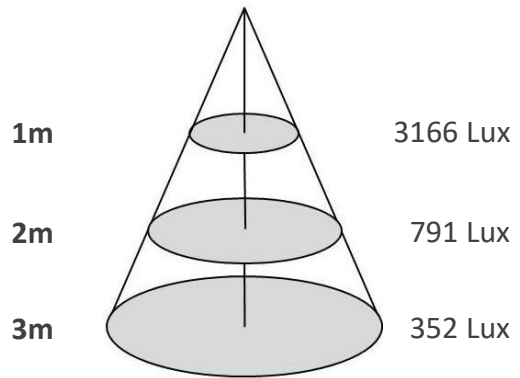

DWR75-DR4-P-10W.lux

PMMA high luminous rate  
Ribbed structure Lens


The ribbed structure design is adopted, with its own antiglar so that the light is interwoven at the center of the reflector, effectively reducing stray light, spot transition is even, more soft and comfortable.



Spring type:



Bending Spring

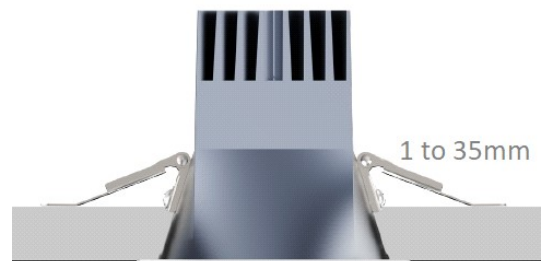

Spring Clip

