

Trimless Downlight

DWR75-DRTF-C-15W



DWR75-DRTF-C-15W.png

Source	LED Osram; Cree; Bridgelux; Citize
Connection	Wire
Gr. Power	15W ±5%
Input Voltage	AC85-277V
Driver	Kegu; Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/24/38
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	1450-1550
Luminaire efficiency	103Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Clear; Louver
Dimensions	Dia A99*B100 (C75)mm
Protection Rating	Indoor Use
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 (Years)

Standard Packing Details

Unit Volum (CBM)	0,00313
Unit GW (kg)	0
Qty per carton	27


Other

Flicker free driver; Tridonic or Philips Driver; Reflector cup: Matt Silver, Matt Black, Sand White, Sand Black, White Gun black, Silver, Champagne gold, Rose gold

Trimless Downlight

DWR75-DRTF-C-15W

Sizes drawing

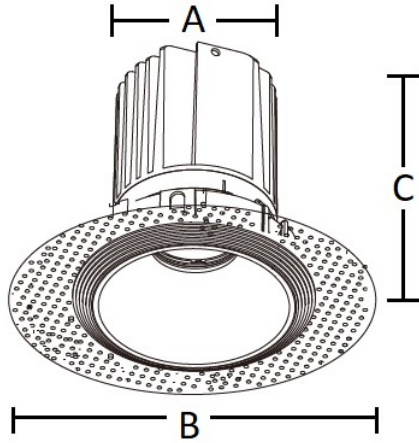


DWR75-DRTF-C-15W.drw

in mm

Illumination Diagram

1550Lm with 24° beam

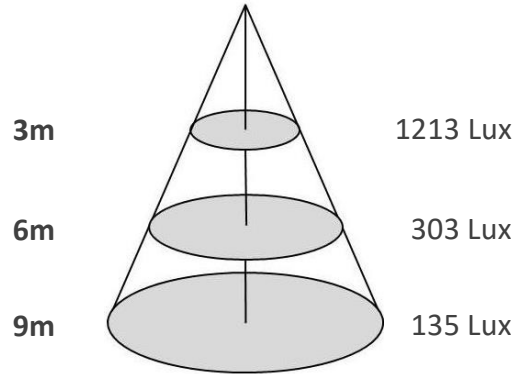

DWR75-DRTF-C-15W.lux



TL1 - adjustable version



TL2 - non adjustable version