

Surface Downlight

DWR95-MB-SF-C-15W



Source	LED Cree; Bridgelux; Citizen
Connection	Wire
Gr. Power	15W ±5%
Input Voltage	AC85-277V
Driver	Kegu; Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/30/45
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	1400-1600
Luminaire efficiency	107Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Lens
Dimensions	dia94*150mm
Protection Rating	Indoor Use
Electrical Class	Class I
Lifetime	>50.000h
Warranty	3 (Years)

Other
Reflector Cup: White, Black, Silver, Gold; Surface mounted or for option pendant mounted


Standard Packing Details

Unit Volum (CBM)	0,00247
Unit GW (kg)	0,7
Qty per carton	16

Surface Downlight

DWR95-MB-SF-C-15W

Sizes drawing

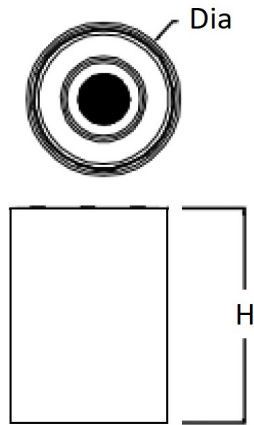


DWR95-MB-SF-C-15W.drw

in mm

Illumination Diagram

1600Lm with 30° beam

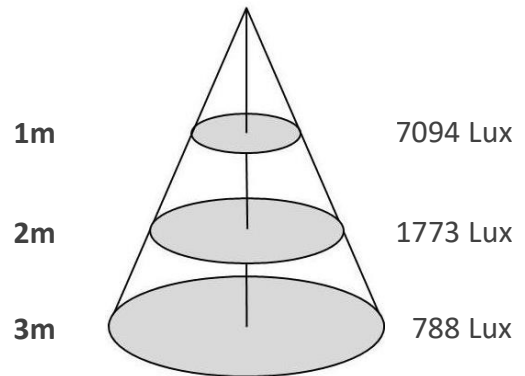

DWR95-MB-SF-C-15W.lux

