

### DWR95-SOG-C-10W



<b>Source</b>	LED Bridgelux
<b>Connection</b>	Wire
<b>Gr. Power</b>	10W ±5%
<b>Input Voltage</b>	AC85-277V
<b>Driver</b>	Lifud
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	120
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
<b>Lumens</b>	1000
<b>Luminaire efficiency</b>	100Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	>90Ra; >97Ra
<b>Fixture Color</b>	White; Black
<b>Cover</b>	Stripped
<b>Dimensions</b>	Dia 95*60mm (hole 80)
<b>Protection Rating</b>	IP40 / IK07
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

#### Standard Packing Details


<b>Unit Volum (CBM)</b>	0,00117
<b>Unit GW (kg)</b>	0,5
<b>Qty per carton</b>	50

#### Other

Reflector in White, Black, Silver or Gold; Cree, Citizen or Osram LED; Tridonic, Philips or Osram Driver; 5 years warranty for option

DWR95-SOG-C-10W

Sizes drawing

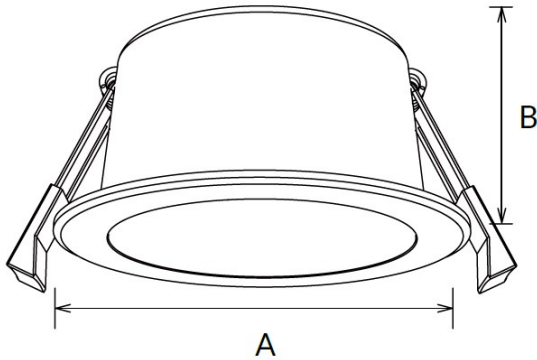


DWR95-SOG-C-10W.drw

in mm

Illumination Diagram

1000Lm with 120° beam

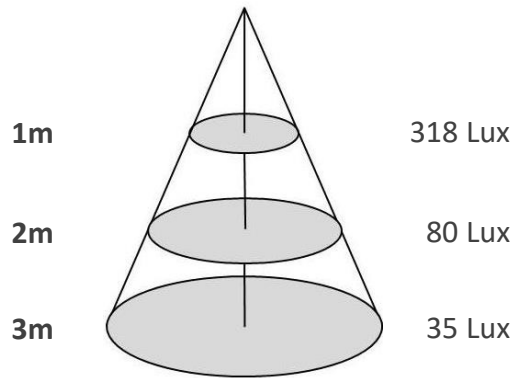

DWR95-SOG-C-10W.lux

Reflector

- W White
- B Black
- CH Chrome
- BN Brushed Nickel
- BB Brushed Brass

