

GMB190-P-50W



Source	LED Bridgelux
Connection	Wire
Gr. Power	50W $\pm$ 5%
Input Voltage	AC85-277V
Driver	Kegu; Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/24/36
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 5700°K
Lumens	4800-5500
Luminaire efficiency	110Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Lens
Dimensions	dia190*170mm (hole175-180)
Protection Rating	IP20
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details


Unit Volum (CBM)	0,00775
Unit GW (kg)	2,8
Qty per carton	8

Other

Optional: Flicker free driver; 5 years warranty extension (with Tridonic driver)

GMB190-P-50W

Sizes drawing

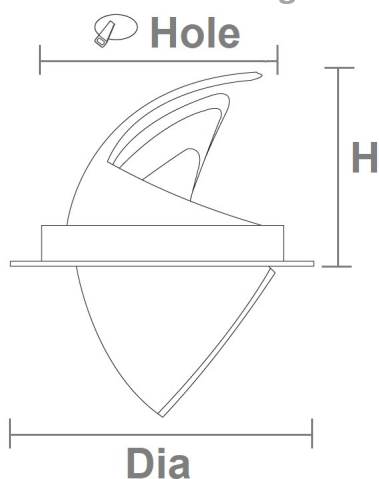


GMB190-P-50W.drw

in mm

Illumination Diagram

5500Lm with 36° beam

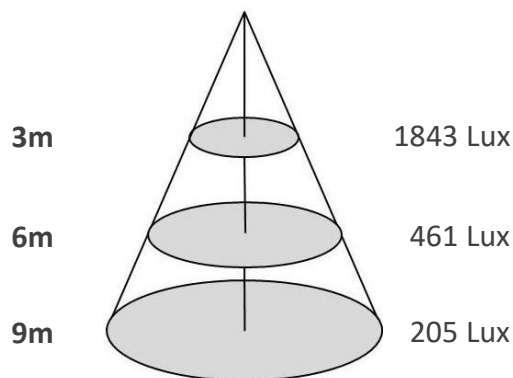

GMB190-P-50W.lux

