

## Outdoor ceiling light

### HUBLLOT242.242-18W

#### Picture



#### Description

<b>Type</b>	LED Outdoor ceiling light
<b>Connection</b>	Wire

#### Electrical Parameters

<b>Gr. Power</b>	18W ±5%
<b>InputVoltage</b>	AC220-240V
<b>Driver</b>	Internal
<b>Dimmable</b>	Not dim.

#### Lighting Parameters

<b>Beam Angle</b>	120
<b>Colors</b>	3000°K; 4000°K; 5000°K; 5700°K
<b>Lumens</b>	1500-1800
<b>CRI</b>	80Ra

#### Structure Parameters


<b>Fixture Color</b>	White; Black
<b>Cover</b>	Milky
<b>Dimensions</b>	242*242(A*B)*59(C)mm (D=23,5)

#### Protection Parameters

<b>Rating</b>	IP65/IK10 <sup>o</sup>
<b>Electrical Class</b>	Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III <input type="checkbox"/>
<b>Lifetime</b>	>50.000h
<b>Warranty (Years)</b>	3

#### Options

<b>Dimmable</b>	Triac <input checked="" type="checkbox"/> 0-10V <input checked="" type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input checked="" type="checkbox"/>
<b>CRI</b>	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
<b>Other</b>	For option: 3-CCT switch / Emergency / Adjustable or remote sensor

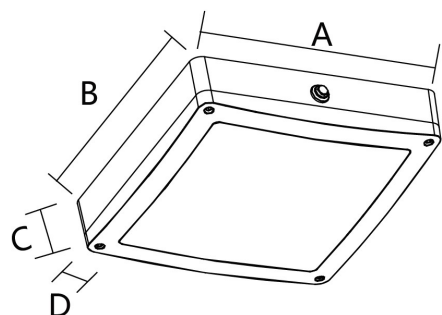

Sizes in mm

#### Packing

<b>UnitVolum (CBM)</b>	0,00535194
<b>Unit GW (kg)</b>	0,87
<b>Qty per carton</b>	12