

JAR-SPOT-C-3W



| | |
|-----------------------------|----------------------|
| Source | LED |
| Connection | Wire |
| Gr. Power | 2,8W ±5% |
| Input Voltage | AC240V |
| Driver | Internal |
| Control (standard) | Not dim. |
| Dimming option | |
| Beam Angle (°) | 10/15/25/45/60/10*60 |
| CCT (Kelvins) | WW; DL; CW |
| Lumens | 150 |
| Luminaire efficiency | 54 Lm/W |
| CRI (standard) | >80Ra |
| for option | |
| Fixture Color | Black; Silver |
| Cover | Clear |
| Dimensions | dia 42*L95*H51mm |
| Protection Rating | IP65/IK02 |
| Electrical Class | Class I |
| Lifetime | >50.000h |
| Warranty | 3 Years |


Other
optional: DC24V RGB; DC24V RGBW; Spic; Base; Cap

Standard Packing Details

| | |
|-------------------------|---------|
| Unit Volum (CBM) | 0,00163 |
| Unit GW (kg) | 0,64 |
| Qty per carton | 18 |

JAR-SPOT-C-3W

Sizes drawing

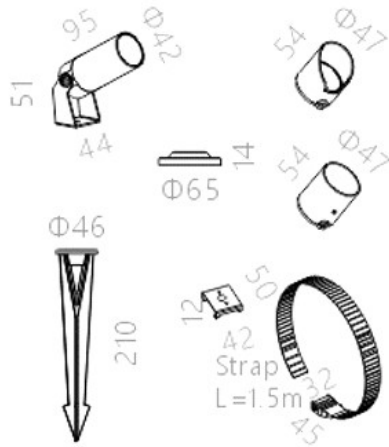


JAR-SPOT-C-3W.drw

in mm

Illumination Diagram

150Lm with 25° beam

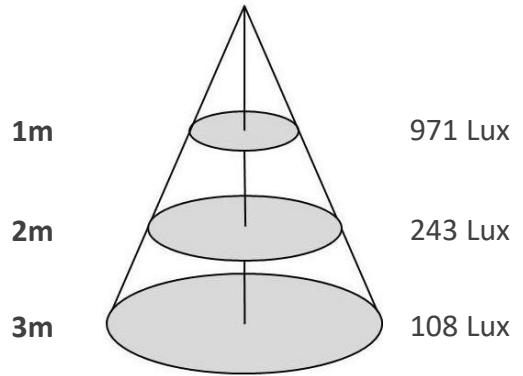

JAR-SPOT-C-3W.lux

Standard



Base



Spic



Grill



Honeycomb



Snoot



Hood



Connection Box



Connection Box with spic



Tree Strap



Pole Clamp

