

### JAR-SPOT-C-5W



<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	5W ±5%
<b>Input Voltage</b>	AC220-240V
<b>Driver</b>	Internal
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	10/15/25/45/60/10*60
<b>CCT (Kelvins)</b>	WW; DL; CW
<b>Lumens</b>	450
<b>Luminaire efficiency</b>	90 Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Black; Silver
<b>Cover</b>	Clear
<b>Dimensions</b>	dia 42*L95*H51mm
<b>Protection Rating</b>	IP65/IK02
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years


#### Standard Packing Details

<b>Unit Volum (CBM)</b>	0,00163
<b>Unit GW (kg)</b>	0,7
<b>Qty per carton</b>	18

**Other**  
optional: DC24V RGB; DC24V RGBW; Spic; Base; Cap

JAR-SPOT-C-5W

Sizes drawing

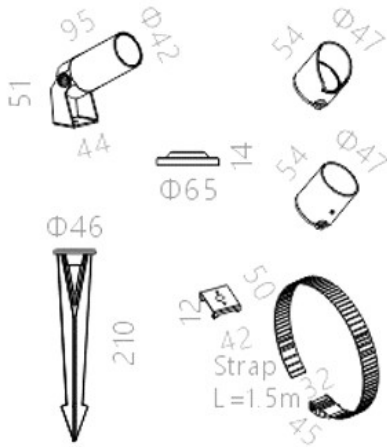


JAR-SPOT-C-5W.drw

in mm

Illumination Diagram

450Lm with 25° beam

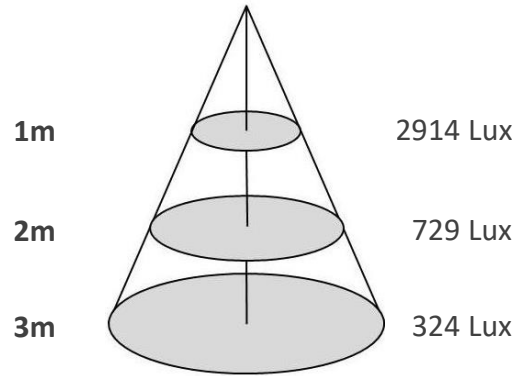

JAR-SPOT-C-5W.lux

Standard



Base



Spic



Grill



Honeycomb



Snoot



Hood



Connection Box



Connection Box with spic



Tree Strap



Pole Clamp

