

JAR-SPOT-P-10W



| | |
|-----------------------------|--------------------------------|
| Source | LED |
| Connection | Wire |
| Gr. Power | 10W ±5% |
| Input Voltage | AC220-240V |
| Driver | Internal |
| Control (standard) | Not dim. |
| Dimming option | |
| Beam Angle (°) | 12/24/38/60/12*60 |
| CCT (Kelvins) | 2700°K; 3000°K; 4000°K; 5700°K |
| Lumens | 800-900 |
| Luminaire efficiency | 90 Lm/W |
| CRI (standard) | >80Ra |
| for option | |
| Fixture Color | Black |
| Cover | Clear |
| Dimensions | dia 63*L115*H71mm |
| Protection Rating | IP65/IK05 |
| Electrical Class | Class I |
| Lifetime | >50.000h |
| Warranty | 3 Years |

Standard Packing Details

| | |
|-------------------------|---------|
| Unit Volum (CBM) | 0,00703 |
| Unit GW (kg) | 1,1 |
| Qty per carton | 8 |

Other

DC24V; Spike; Bottom Box; Tree Strap; Pole Clamp; Grille; Honeycomb; Hood; Snoot; Zoom

JAR-SPOT-P-10W

Sizes drawing




JAR-SPOT-P-10W.drw

in mm

Illumination Diagram

900Lm with 24° beam

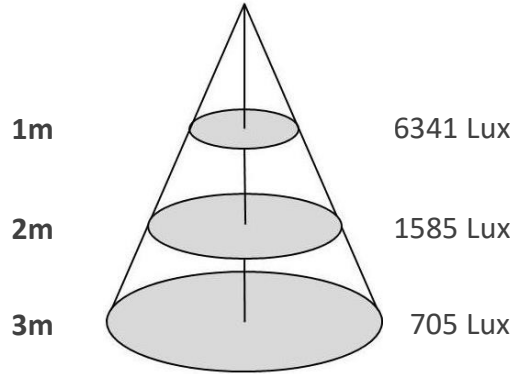

JAR-SPOT-P-10W.lux

Standard



Base



Spic



Grill



Honeycomb



Snoot



Hood



Connection Box



Connection Box with spic



Tree Strap



Pole Clamp

