

### JAR-SPOT-P-15W



<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	15W ±5%
<b>Input Voltage</b>	AC220-240V
<b>Driver</b>	Internal
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	15/24/38/60/15*60
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4000°K; 5700°K
<b>Lumens</b>	1200-1350
<b>Luminaire efficiency</b>	90 Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Black
<b>Cover</b>	Clear
<b>Dimensions</b>	dia 75*L130*H71mm
<b>Protection Rating</b>	IP65/IK05
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

#### Standard Packing Details

<b>Unit Volum (CBM)</b>	0,00703
<b>Unit GW (kg)</b>	1,1
<b>Qty per carton</b>	8

#### Other

DC24V; Spike; Bottom Box; Tree Strap; Pole Clamp; Grille; Honeycomb; Hood; Snoot; Zoom

JAR-SPOT-P-15W

Sizes drawing




JAR-SPOT-P-15W.drw

in mm

Illumination Diagram

1350Lm with 24° beam

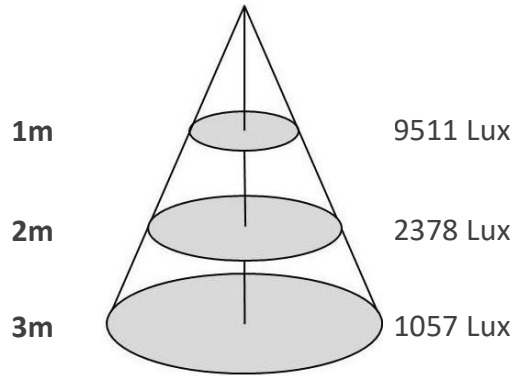

JAR-SPOT-P-15W.lux

Standard



Base



Spic



Grill



Honeycomb



Snoot



Hood



Connection Box



Connection Box with spic



Tree Strap



Pole Clamp

