

JAR-SPOT-P-25W



Source	LED
Connection	Wire
Gr. Power	25W ±5%
Input Voltage	AC220-240V
Driver	Internal
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	15/24/38/60/15*60
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5700°K
Lumens	2000-2250
Luminaire efficiency	90 Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black
Cover	Clear
Dimensions	dia 95*L162*H71mm
Protection Rating	IP65/IK05
Electrical Class	Class I
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details

Unit Volum (CBM)	0,00857
Unit GW (kg)	1,6
Qty per carton	8

Other
DC24V; Spike; Bottom Box; Tree Strap; Pole Clamp; Grille;
Honeycomb; Hood; Snoot; Zoom

JAR-SPOT-P-25W

Sizes drawing




JAR-SPOT-P-25W.drw

in mm

Illumination Diagram

2250Lm with 24° beam

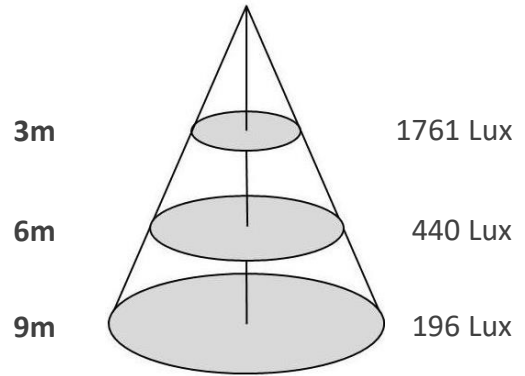

JAR-SPOT-P-25W.lux

Standard



Base



Spic



Grill



Honeycomb



Snoot



Hood



Connection Box



Connection Box with spic



Tree Strap



Pole Clamp

