

JAR-SPOT-P-3W



Source	LED
Connection	Wire
Gr. Power	3W ±5%
Input Voltage	AC220-240V
Driver	Internal
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	10/15/25/45/60/10*60
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5700°K
Lumens	240-270
Luminaire efficiency	90 Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black; Silver
Cover	Clear
Dimensions	dia 47*L93*H71mm
Protection Rating	IP65/IK05
Electrical Class	Class I
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details

Unit Volum (CBM)	0,00196
Unit GW (kg)	0,7
Qty per carton	15

Other

DC24V; Spike; Bottom Box; Tree Strap; Pole Clamp; Grille; Honeycomb; Hood; Snoot

JAR-SPOT-P-3W

Sizes drawing




JAR-SPOT-P-3W.drw

in mm

Illumination Diagram

270Lm with 24° beam

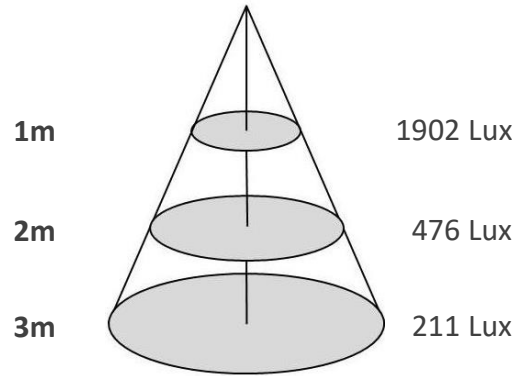

JAR-SPOT-P-3W.lux

Standard



Base



Spic



Grill



Honeycomb



Snoot



Hood



Connection Box



Connection Box with spic



Tree Strap



Pole Clamp

