

### OUTDOOR480-COB-P (8mm) IP65



OUTDOOR480-COB-P (8mm) IP65.png

<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	11W/mW ±5%
<b>Input Voltage</b>	DC24V
<b>Driver</b>	Not Included
<b>Control (standard)</b>	Dimmable
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	180
<b>CCT (Kelvins)</b>	WWY; WW; DL; CW
<b>Lumens</b>	1100-1200/m
<b>Luminaire efficiency</b>	Lm/W
<b>CRI (standard)</b>	>90Ra
<b>for option</b>	
<b>Fixture Color</b>	White
<b>Cover</b>	Clear
<b>Dimensions</b>	5000*8*1,6mm (cut:50mm)
<b>Protection Rating</b>	IP65
<b>Electrical Class</b>	Class III
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	2 Years


**Other**  
Available in DC12V cutting lenght 25mm

#### Standard Packing Details

<b>Unit Volum (CBM)</b>	0,00075
<b>Unit GW (kg)</b>	0,55
<b>Qty per carton</b>	80

### OUTDOOR480-COB-P (8mm) IP65

Sizes drawing

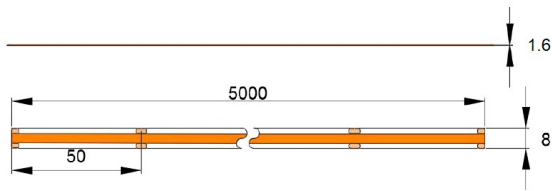


OUTDOOR480-COB-P (8mm) IP65.drw

in mm

Illumination Diagram

1200Lm with 180° beam

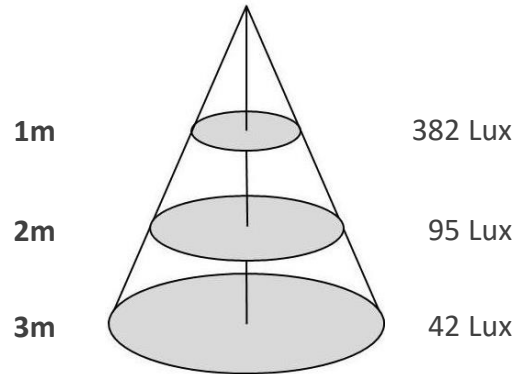

OUTDOOR480-COB-P (8mm) IP65.lux

