

Flood light

PROJ-FK-P-300W



<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	300W ±5%
<b>Input Voltage</b>	AC100-277V
<b>Driver</b>	Lifud; Sosen
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	1-10V dim; DALI
<b>Beam Angle (°)</b>	30/60/90/120/T2M/T3M
<b>CCT (Kelvins)</b>	3000°K; 4000°K; 6500°K
<b>Lumens</b>	45000
<b>Luminaire efficiency</b>	150Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Black; Silver; Grey
<b>Cover</b>	Clear
<b>Dimensions</b>	524*545*65mm
<b>Protection Rating</b>	IP66/IK08
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	5 Years

Standard Packing Details


<b>Unit Volum (CBM)</b>	0,04047
<b>Unit GW (kg)</b>	12
<b>Qty per carton</b>	1

**Other**

Die Cast Alum. Body; Option: Marine corrosion coating; Flicker free driver; MeanWell Driver; 3 years ECO version

PROJ-FK-P-300W

Sizes drawing

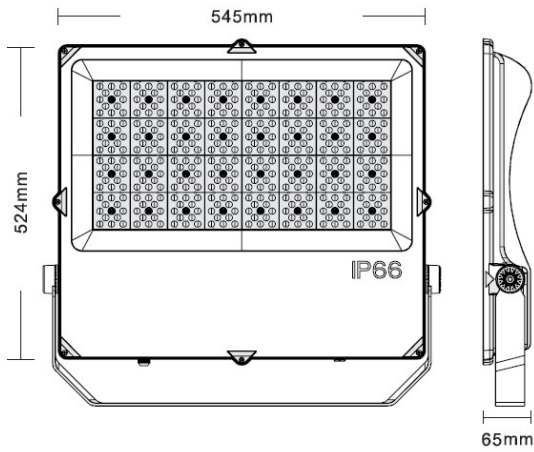


PROJ-FK-P-300W.drw

in mm

Illumination Diagram

45000Lm with 90° beam

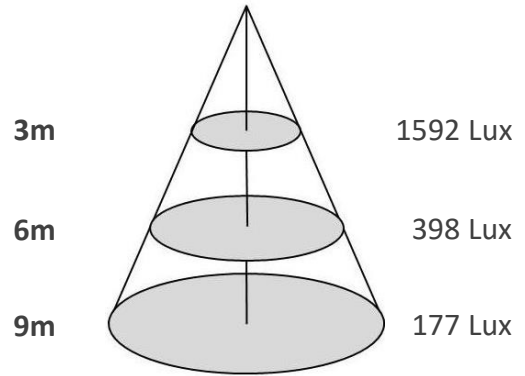

PROJ-FK-P-300W.lux

