

Stadium Light

STADIUM3-P-1800W



| | |
|-----------------------------|--------------------------------|
| Source | LED Lumileds; Cree |
| Connection | Wire |
| Gr. Power | 1800W ±5% |
| Input Voltage | AC100-277V |
| Driver | Inventronics; Meanwell |
| Control (standard) | Not dim. |
| Dimming option | |
| Beam Angle (°) | 15/30/60/40*85 |
| CCT (Kelvins) | 2700°K; 3000°K; 4500°K; 6500°K |
| Lumens | 252000 |
| Luminaire efficiency | 140Lm/W |
| CRI (standard) | >80Ra |
| for option | |
| Fixture Color | Black |
| Cover | Clear |
| Dimensions | 1068*676*265,5mm |
| Protection Rating | IP66/IK08/LM79/LM80 |
| Electrical Class | Class I |
| Lifetime | >50.000h |
| Warranty | 5 Years |

Other


Can be mounted together by special bracket to reach up to 1800W

Standard Packing Details

| | |
|-------------------------|---------|
| Unit Volum (CBM) | 0,34147 |
| Unit GW (kg) | 58 |
| Qty per carton | 1 |

STADIUM3-P-1800W

Sizes drawing

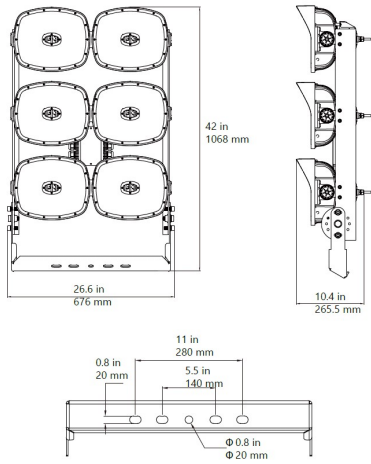


STADIUM3-P-1800W.drw

in mm

Illumination Diagram

252000Lm with 30° beam

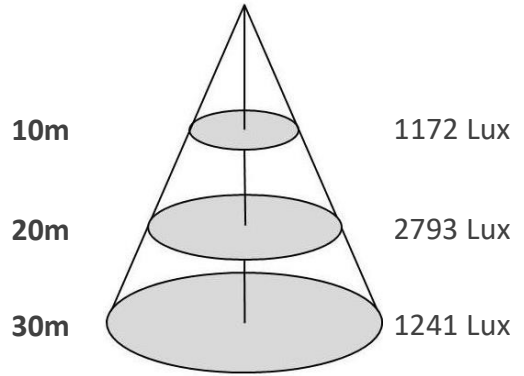

STADIUM3-P-1800W.lux

