

## Stadium Light

### STADIUM3-P-240W



<b>Source</b>	LED Lumileds; Cree
<b>Connection</b>	Wire
<b>Gr. Power</b>	240W ±5%
<b>Input Voltage</b>	AC100-277V
<b>Driver</b>	Inventronics; Meanwell
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	15/30/60/40*85
<b>CCT (Kelvins)</b>	2700°K; 3000°K; 4500°K; 6500°K
<b>Lumens</b>	33600
<b>Luminaire efficiency</b>	140Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Black
<b>Cover</b>	Clear
<b>Dimensions</b>	332*260*267(287)mm
<b>Protection Rating</b>	IP66/IK08/LM79/LM80
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	5 Years

#### Standard Packing Details


<b>Unit Volum (CBM)</b>	0,05586
<b>Unit GW (kg)</b>	11
<b>Qty per carton</b>	1

#### Other

Can be mounted together by special bracket to reach up to 1800W

**STADIUM3-P-240W**

**Sizes drawing**

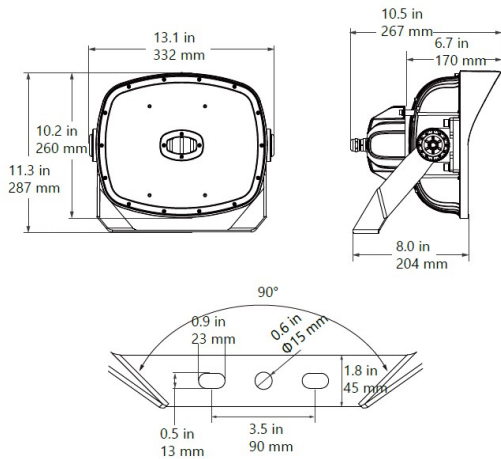


STADIUM3-P-240W.drw

in mm

**Illumination Diagram**

33600Lm with 60° beam

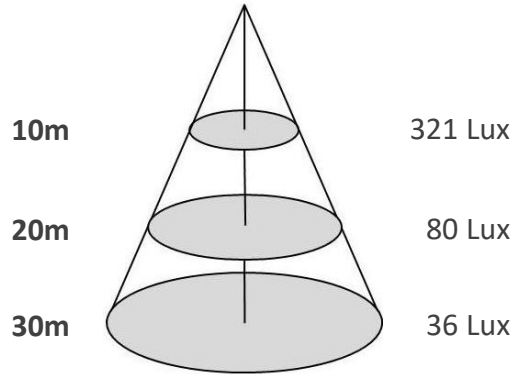


STADIUM3-P-240W.lux

**STADIUM3-P-200W \* 2 with bracket**



**Horizontal Bracket A**

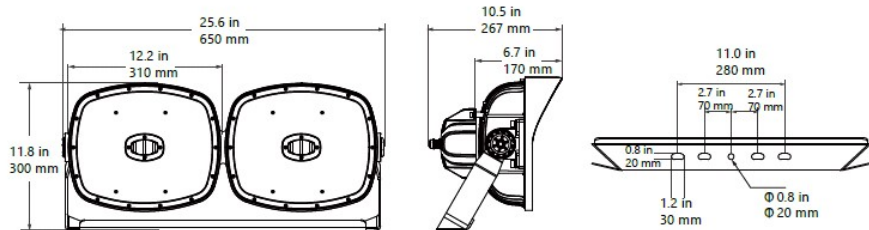

**Vertical Bracket B**

