

Stadium Light

STADIUM3-P-600W



Source	LED Lumileds; Cree
Connection	Wire
Gr. Power	600W ±5%
Input Voltage	AC100-277V
Driver	Inventronics; Meanwell
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	15/30/60/40*85
CCT (Kelvins)	2700°K; 3000°K; 4500°K; 6500°K
Lumens	84000
Luminaire efficiency	140Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black
Cover	Clear
Dimensions	650*260*267(300)mm
Protection Rating	IP66/IK08/LM79/LM80
Electrical Class	Class I
Lifetime	>50.000h
Warranty	5 Years

Standard Packing Details

Unit Volum (CBM)	0,10473
Unit GW (kg)	21
Qty per carton	1


Other

Can be mounted together by special bracket to reach up to 1800W

Stadium Light

STADIUM3-P-600W

Sizes drawing

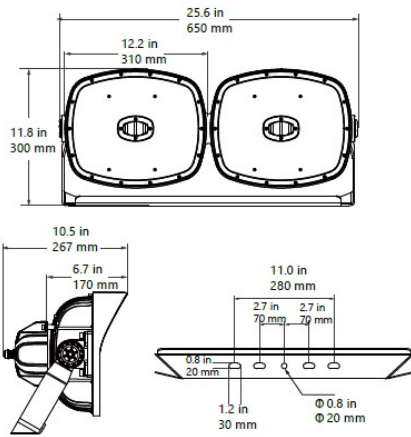


STADIUM3-P-600W.drw

in mm

Illumination Diagram

84000Lm with 60° beam

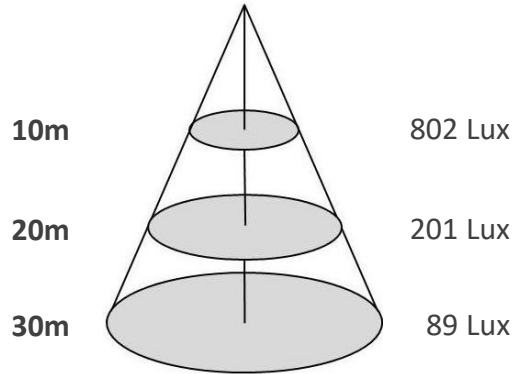


STADIUM3-P-600W.lux

STADIUM3-P-200W * 2 with bracket



Horizontal Bracket A

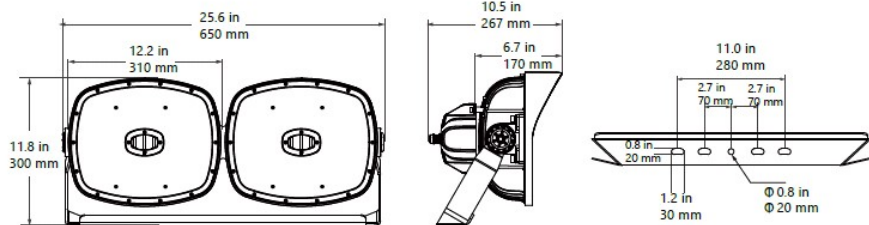

Vertical Bracket B

