

Magnetic Track Light

TRACK-CX20-TL-15W



| | |
|-----------------------------|--|
| Source | LED Bridgelux |
| Connection | M20 Magnetic |
| Gr. Power | 15W ±5% |
| Input Voltage | DC48V |
| Driver | Not Included |
| Control (standard) | Not dim. |
| Dimming option | 1-10V dim; DALI |
| Beam Angle (°) | 15/24/36 |
| CCT (Kelvins) | 2700°K; 3000°K; 4000°K; 6500°K; CCT adjust. |
| Lumens | 1500 |
| Luminaire efficiency | 100Lm/W |
| CRI (standard) | >80Ra |
| for option | >90Ra |
| Fixture Color | White; Black |
| Cover | Lens |
| Dimensions | A65*B160mm |
| Protection Rating | Indoor Use |
| Electrical Class | Class II |
| Lifetime | >50.000h |
| Warranty | 3 Years |

Other

For option: Adjustable CCT 2700-6500K


Standard Packing Details

| | |
|-------------------------|---------|
| Unit Volum (CBM) | 0,00201 |
| Unit GW (kg) | 0,73 |
| Qty per carton | 25 |

Magnetic Track Light

TRACK-CX20-TL-15W

Sizes drawing

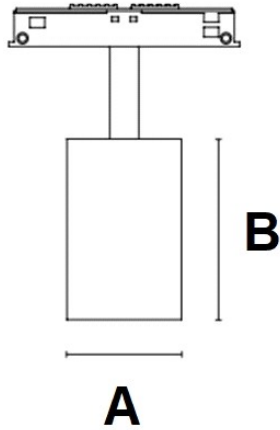


TRACK-CX20-TL-15W.drw

in mm

Illumination Diagram

1500Lm with 24° beam

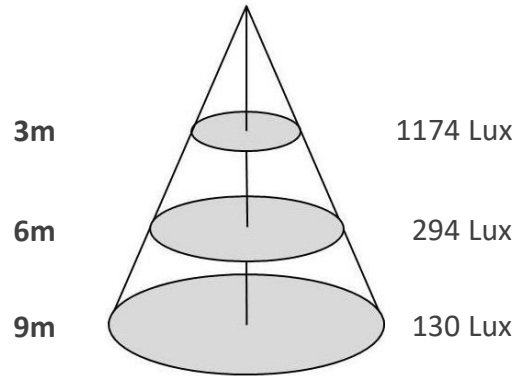

TRACK-CX20-TL-15W.lux

20mm Magnetic Track Lighting System

